


RA DS Series

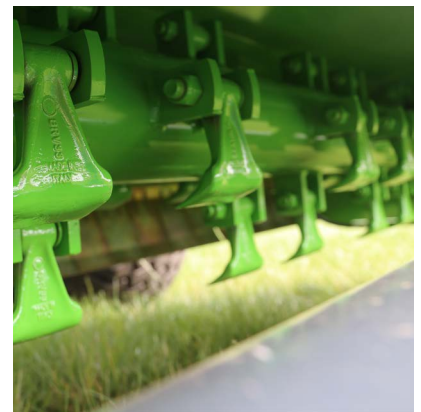

Overview

Suited to paddock and parkland maintenance the RA DS series with double skin chassis construction is a hardwearing yet compact machine.

With a user friendly configuration the RA DS makes light work of offset mowing with a practical 350mm hydraulic side shift.

The RA DS is fitted with an adjustable rear roller for setting of the cutting height which is made simple thanks to the roller's forged spherical ends.

As standard the RA comes with a large diameter, heavy duty rotor fitted with forged hammer flails capable of tackling overgrowth with ease.

This compact but hardwearing model is a versatile solution catering for a broad range of applications.

Features

- **Large diameter rotor fitted with heavy forged hammer flails**
- **350mm hydraulic side shift**
- **Adjustable rear roller and full length side skids**
- **Category 1 three-point linkage with adjustable lower tractor links**

Specification			
RA DS Series	RA 160 DS	RA 180 DS	RA 200 DS
HP Requirement	30 - 70 HP	30 - 70 HP	30 - 70HP
Width	155cm	181cm	194cm
Dimensions	177 x 100 x 95cm	204 x 100 x 95cm	216 x 100 x 95cm
Linkage Type	Cat 1 / 2 3-Point	Cat 1 / 2 3-Point	Cat 1 / 2 3-Point
Hydraulic Side Shift	350mm	350mm	350mm
PTO Speed	540rpm	540rpm	540rpm
Chassis Construction	Double Skin	Double Skin	Double Skin
Number of Flails	22	26	28
Weight	370kg	404kg	420kg

* Other sizes are available on request

Watch the
video

